

Closet Organizers USA



**Custom Storage Solutions  
without Custom Prices**

Your satisfaction is very important to us. If you need any assistance whatsoever, phone us toll free at 1-866-418-1328 between 9am to 5pm Eastern Time. Or if you prefer, send e-mail to [info@ClosetOrganizersUSA.com](mailto:info@ClosetOrganizersUSA.com)

**Tools required to remove the existing closet material:**

1. Hammer, crowbar and screwdrivers for removing the old material.
2. Spackle and spackle knife to fill any holes left from removing the old material.

**Tools required to install your new Closet Organizers USA wardrobe system:**

1. Tape measure and pencil
2. 3' or a 4' Level.
3. Step ladder
4. Cordless OR electric drill for securing the hanging rail to the wall studs.
5. Phillips head screw driver, #2 screw size for tightening the cam lock fittings.


## Installation Instructions

### 1st Step

Remove all old closet material from back and sidewalls. Spackle and paint as needed.

### 2nd Step


Measure up from the floor and make a mark on the wall at the designated height. For a standard 8' ceiling, hang the rail at 82". For lower ceilings, adjust accordingly. Using your level, draw a level line across the back wall at that same height above the floor.

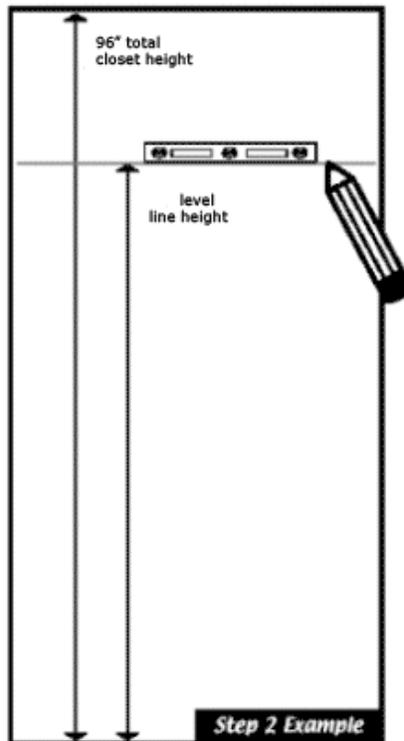

This measurement is very important since this will set the proper height to allow clothing to be double hung where desired (yielding approximately 40" in each area for double hang clothing). This will also give you a top shelf at approximately 12" down from the ceiling, (if your ceiling height is 96").

### 3rd Step

Locate the wall studs by tapping on the wall to hear density we suggest using a finishing nail or screw to confirm where the wall studs are located. Once you have found a stud, measure 16" over to find the next stud. Repeat this process until all studs are found and marked.

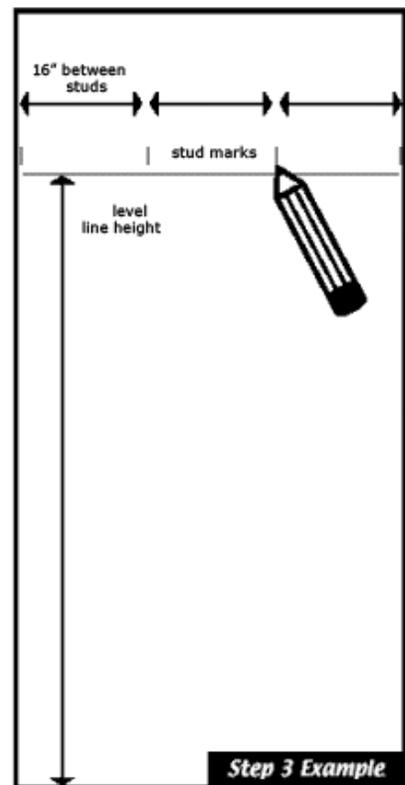

Next, position the track along the line from the level and attach to the wall. Be sure you have the track in the proper position (with the angle coming toward you on the top) as you proceed.

# Closet Organizers Installation Guide

### 3rd Step, continued

Holding the hanging rail/track in place against the wall, make a light pencil mark through the holes on the hanging rail where the studs are located.


Next, pre-drill each spot where you have marked the track for wall stud locations. (Also be sure to pre-drill the hanging rail where wall studs are located in each corner). You may need to drive the screws in on a slight angle in the corners to find the wall studs.

### 4th Step

Holding the track against the wall, drive the screws into each stud, securely fastening the hanging rail to the wall studs.

### 5th Step

Prepare the verticals by attaching the Rail Claw using the pre-drilled holes at the top of the panel. Hook the vertical panels on the hanging rail as per your closet design.

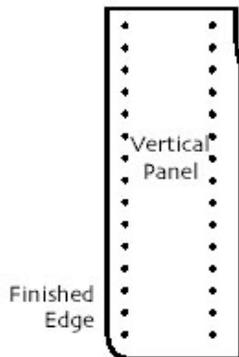

Next, insert the Cam Pins into the vertical panels per the attached drawing. Insert the round Cam Locks into the pre-drilled holes of the cam shelves so that the open slot faces out.

#### Note:

There are (2) types of cam pins:

*Type # 1 the short cam pins simply screw into the predrilled holes in the panel. These are used in end panels or when there is NO other cam shelf used directly next to the cam shelf.*

*Type # 2 the long silver cam pins come in two pieces and screw together. These pins are used on center panels when two cam shelves are used next to each other.*

#### Note:

*The cam shelves must be placed snugly against the panel before you tighten the cam fitting into the cam pin.*


*Simply insert your Phillips head screwdriver into the screw head in the cam fitting and turn it clockwise one full turn (it will stop when tight DO NOT FORCE IT!!).*

*Repeat this process with all cam shelves.*

### 6th Step

Next, insert the closet rod ends into the panels where indicated on the drawing.


Rods are pre-cut and should fit right into place.

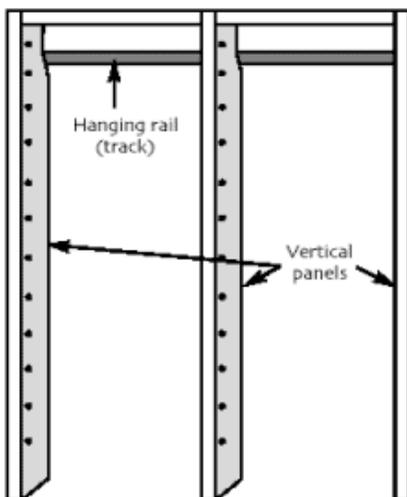

### CLOSETS WITH SHELVING ONLY

In a closet where all shelving is to be installed (no hanging rods), your short cam pins will be used on the (2) top holes and the (2) bottom holes on each outside panel (right and left).

The long cam pins will be used in the center panels these cam pins are double sided and will allow you to attach continuous cam shelves along the top and bottom of your new closet system.

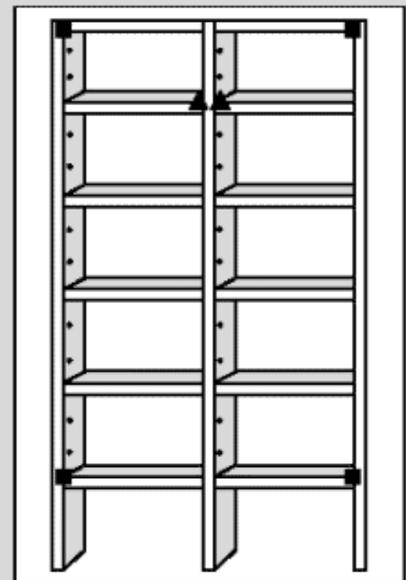

- = Short, grey cam pins
- ▲ = Long, double-sided cam pins

After attaching all top and bottom cams, next insert the shelf pins in the desired locations and install your shelves where needed.

